

Product Data Sheet GW27043

27 COMBI Range




A complete, versatile system of modular containers, perfectly integrable in the SYSTEM domestic range and able to meet the high protection installation requirements of the residential, commercial and industrial sectors. The 27 COMBI range is available both in the IP40 version and in watertight versions with IP55, IP65 and IP66 degree of protection, recommended for all outdoor applications which are subjected to extreme atmospheric conditions.

Description	3 gang	Colour	Grey RAL 7035	
Door type	With membrane	Door colour	Transparent	
No. knockout holes Ø23	3 on sides / 1 on the bottom	N. holes Ø 23 with cable gland	1	
Type of knockout holes	Removable with tool	IP degree	IP55	
Insulation class		Mechanical resistance	IK07	
Lid screws	Stainless steel	Torque screws tightening	0.8 Newton/meter	
Outer dim. LxHxD (mm)	99x82x65	Glow Wire Test	650 °C	
Thermo-pressure with ball	70 °C	Standard	EN 60670-1	
Installation temperature	-25 +60 °C	Electrocod	0212	

			BEHAV	IOUR WITH CH	EMICAL AND A	IMOSPHERIC A	GENTS			
Saline solution	Acids		Bases		Solvents			Mineral	UV	
	Concentrated	Diluited	Concentrated	Diluited	Hexane	Benzol	Acetone	Alcohol	oil	rays
Resistant	Limited resistance	Resistant	Resistant	Resistant	Limited resistance	Not resistant	Not resistant	Not resistant	Limited resistance	Resistant



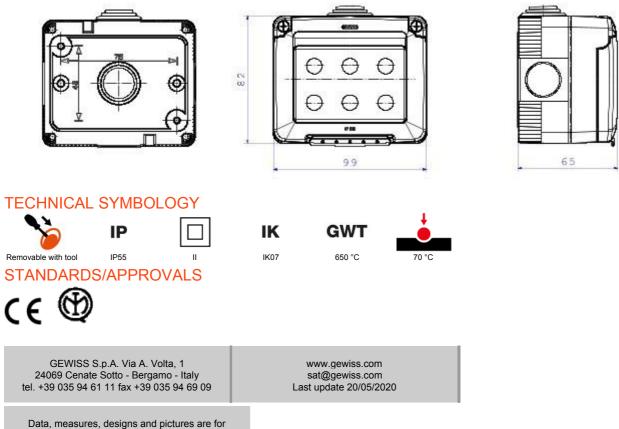

information purpose only, last update . They can be changed at any moment, therefore it is always ecommended to read the last updated version published on the website www.gewiss.com. Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at https://www.gewiss.com/it/en/company/landingpage/ledwarranty.