



300M Universal Beam Clamp

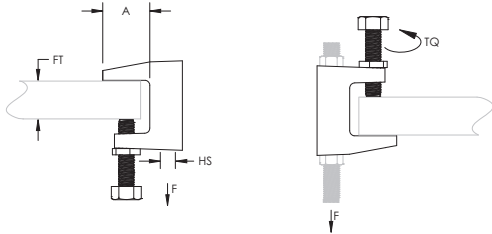

Material: Cast Iron
Finish: Electrogalvanized



Part Number	Article Number	Hole Size HS	Flange Thickness FT	A	Torque TQ	Static Load F	Certifications	Standard Packaging Quantity
Hole Type: Plain								
30009MM	389500	9 mm	18 mm Max	21 mm	14 N-m	1,200 N	VdS	100 pc
3009MMSP5	175830	9 mm	18 mm Max	21 mm	14 N-m	1,200 N	VdS	10 x 5 pc
30011MM	389510	11 mm	20 mm Max	23 mm	14 N-m	2,500 N	FM, VdS	100 pc
30011MMSP5	175840	11 mm	20 mm Max	23 mm	14 N-m	2,500 N	FM, VdS	10 x 5 pc
30013MM	389520	13 mm	26 mm Max	35 mm	14 N-m	3,500 N	FM, VdS	80 pc
30017MM	389505	17 mm	28 mm Max	30 mm	14 N-m	5,500 N	FM, VdS	50 pc
Hole Type: Threaded								
300M6	386805	M6	18 mm Max	21 mm	14 N-m	1,200 N	-	140 pc
300M6SP5	175910	M6	18 mm Max	21 mm	14 N-m	1,200 N	-	10 x 5 pc
300M8	386810	M8	18 mm Max	21 mm	14 N-m	1,200 N	VdS	100 pc
300M10	386820	M10	20 mm Max	23 mm	14 N-m	2,500 N	FM, VdS	100 pc
300M12	386830	M12	26 mm Max	35 mm	14 N-m	3,500 N	FM, VdS	80 pc

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

FM is a registered certification mark of FM Approvals LLC, LTD. VdS is a registered trademark of VdS Schadenverhütung GmbH.

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2016 Pentair All rights reserved
Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.
All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

