
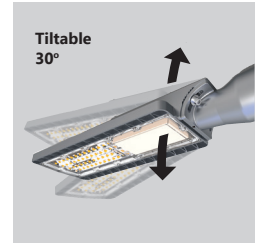


## Valo 100W 4000K Datasheet

14000lm LED Street Light

PXVALO100W

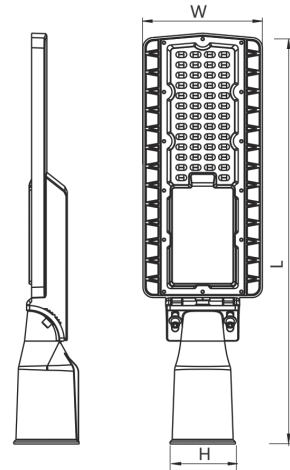


Watts (W)	100
L (mm)	623
W (mm)	200
H (mm)	76
Pole Ø (mm)	60







Dimensions	623*200*76mm
Wattage	100W
Input Voltage	100-240V
Frequency	50-60Hz
Current (A)	0.5
Colour Temperature	4000K
Ra	≥70
Power Factor	≥0.9
Ta(°C)	-20~45
Lumens	14000
Efficiency	140Lm/W
Lifetime	50,000h
Colour	Dark Grey
Beam Angle	Type II
Tiltable	30°
IP Rating	IP65
Certification	CE, CB, ENEC
Fitting Warranty	5 Years

### Features & Applications

- Tiltable 30°
- 4000K colour temperature
- Highly Efficient 140 Lm/W
- Excellent photometric design
- Complete with NEMA socket
- IP65 protection rating
- 60mm pole diameter size
- 76mm spigot available (to be ordered separately)
- 50,000 hour lifetime
- Excellent heat dissipation to extend the life of the LEDs.
- 5 year warranty