


Sensor-switched LED floodlight

XLED curved

V2 white

EAN 4007841 012083

STEINEL[®]
Intelligent technology



LED

10w



3000K warm-white



4000K neutral white



infrared sensor 160°



max. 8 m



IP44



2 - 1000 lux



2 sec - 70 min



ideal 2 m

30 years (Ø 4,5h / day)

10 W 1125 lm

Function description

Illuminating compact model. Sensor LED floodlight XLED curved with 9 W, compact and discreet lighting solution for building entrances, pathways and co., attractive luminous efficiency (1125 lm) requiring very little energy, sensor reach of up to 8 m, tilting range of +30°.

Technical specifications

Dimensions (L x W x H)	120 x 160 x 107 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	4,00 m
Sensor Technology	passive infrared
Output	9 W
Interconnection	No
Luminous flux	1125 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	160 °
Sneak-by guard	Yes

Capability of masking out individual segments	No
Reach, radial	r = 4 m (22 m ²)
Photo-cell controller	Yes
Twilight setting	2 – 1000 lx
Time setting	2 s – 70 Min.
Basic light level function	No
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 50 °C
Housing material	HCMC
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
PU1, net weight	0,39 kg
Version	white
PU1, EAN	4007841012083

<https://www.steinell.de>

Sensor-switched LED floodlight


XLED curved

V2 white

EAN 4007841 012083



Detection Zone

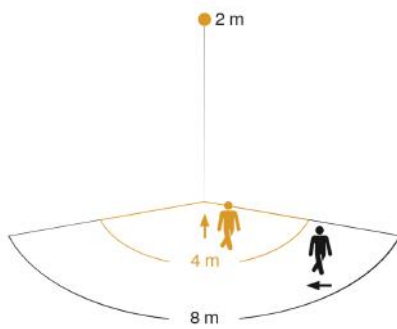

Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

