


Monza CCT 10W (White) Datasheet

IP54 Colour Selectable LED Downlight



PXMZ10WC



3000K

4000K

5700K

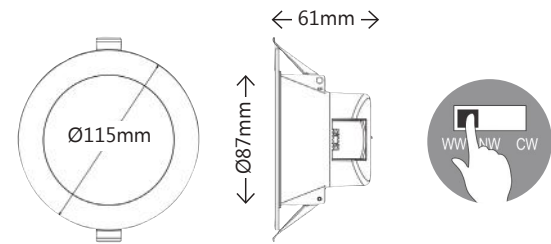

*LED cover only, other parts IP40

Dimensions	Ø115*61mm Cutout 90-95mm
Input Voltage	AC230V
Frequency	50Hz
Efficiency	≥83%
Input Power	10W
Power Factor	≥0.9
Colour Temperature	3000K / 4000K / 5700K
Luminous Flux	800Lm(3000K) / 940Lm(4000K) / 870Lm(5700K)
Housing Color	White
Beam Angle	90°
Color Rendering Index	≥80
Life Time	40,000h
Dimmable	Yes
Dimming Range	8-100%
LEDs	SMD
Protection Level	IP54 (LED cover only, other parts IP40)
Working Temperature	-20°C~+45°C
Operating Humidity	0~90%
Warranty	3 Years

Features & Applications

The Prelux Monza CCT 10W LED Downlight adopts high lumen SMD LEDs and a PMMA diffuser with an even light output. The housing material is V0-fire rated plastic which provides excellent thermal dissipation to greatly add to the life of the LEDs.

Dimming capability makes this an extremely flexible fitting for a broad range of applications.

- Environmentally friendly, without Mercury or other hazardous substances
- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Dimmable when using Triac Dimmer
- 90° wide beam angle
- Ø90-95mm cutout
- CCT: 3000K / 4000K / 5700K
- No UV/IR light