
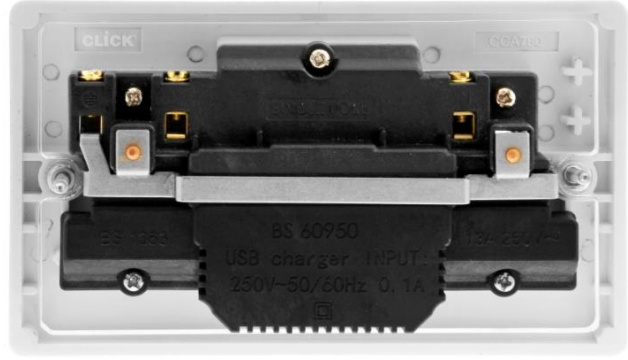


SPECIFICATION SHEET

Product Code	CCA780
---------------------	--------

Description	13A 2 Gang Switched Socket Outlet with Twin USB Charging Outlets
--------------------	--

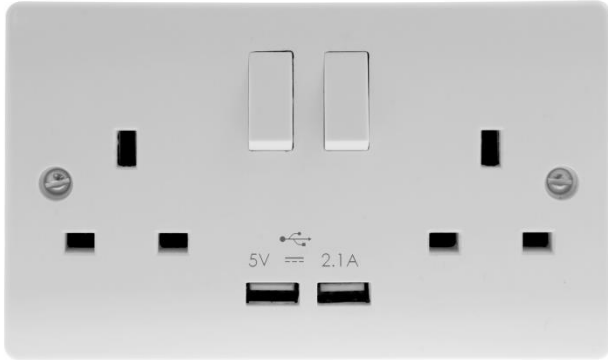

General Information	
Dimensions	146mm x 86mm x 9.5mm
Material composition	Front Plate: Urea Rear Housing: Nylon (PA66) Terminals: Brass Terminal Screws: Steel and Yellow Passivated Earth Strap: Mild Steel Internal Busbars: Formed Pressed Brass PCB: Mixed Components Silver "on-lay" copper/brass contacts
Back Box Depth	25mm – 47mm
Cable Size	L & N = Up to 3 x 2.5mm ² solid or stranded, or up to 2 x 4mm ² stranded conductors. Earth = Up to 3 x 1.5mm ² or 2.5mm ² solid or stranded, or up to 2=2 x 4mm ² stranded conductors
Terminal Size	Live: 5mm Neutral: 5mm Earth: 5mm
Switched	Yes
Double Pole	No (Single Pole)
Twin Earth	No (Single Earth)
USB Charging Output	5V DC, 2.1A (Single Use), 1A (Both in Use)
USB Output Connector	(2x) USB Type "A"
USB Standby Current	2mA
Warranty	1 Year

Standards	
	BS 5733 (BS 1363-2) BS EN 60950-1 (USB Charger) EN 61000-6-1/3, EN 61204-3 (EMC Directive)

Additional Information	
	Ensure that the mains supply is isolated before commencing installation. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.9% kill rate across all four types of the strains of bacteria – MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0