


Sensor-switched indoor light

RS 16 L

EAN 4007841 738013

STEINEL[®]
Intelligent technology



max.60w



high frequency
sensor 360°



Ø 3 - 8 m



IP44



2 - 2000 lux



5 sec - 15 min



energy saving



3 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie



CE



EMC

Function description

Great value. High-frequency indoor light RS 16 L, ideal for corridors, hallways, stairwells and bathrooms, 360° angle of coverage, infinitely variable electronic reach setting from 3 - 8 m, selectable time and twilight threshold, capability of connecting additional loads (e.g. extractor fan).

Technical specifications

Dimensions (Ø x H)	275 x 95 mm	Mechanical scalability	No
Mains power supply	230 – 240 V / 50 Hz	Reach, radial	Ø 8 m (50 m ²)
Sensor Technology	High frequency	Photo-cell controller	Yes
Transmitter power	< 1 mW	Twilight setting	2 – 2000 lx
Output	60 W	Time setting	5 s – 15 Min.
Interconnection	Yes	Impact resistance	IK03
Switching output 1, resistive	800 W	IP-rating	IP44
With lamp	No	Protection class	II
Lamp	All-purpose lamp	Ambient temperature	-10 – 50 °C
Base	E27	Housing material	Plastic
With motion detector	Yes	Cover material	Glass opal
Detection	also through glass, wood and stud walls	Manufacturer's Warranty	3 years
Detection angle	360 °	Settings via	Potentiometers
Angle of aperture	160 °	PU1, EAN	4007841738013
Electronic scalability	Yes		

Accessories

EAN 4007841 035181 Replacement base for RS 16


Sensor-switched indoor light

RS 16 L

EAN 4007841 738013

STEINEL[®]
Intelligent technology

Detection Zone

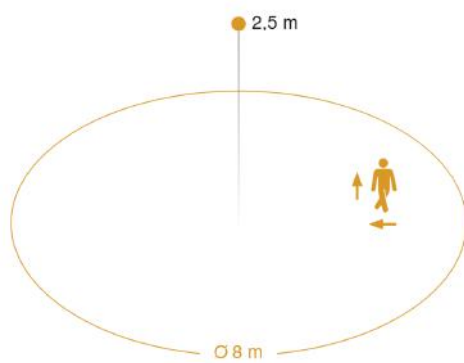

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential