



APLEDDVRL



Features

- Ultra-slim unobtrusive modern design.
- Directional light output provides optimum facial illumination.
- All switches SELV rated for ultimate safety.
- Night light function with four minute timed override switch for full power output.
- Only 1.8W power consumption in night light mode.
- Optional wiring facility for remote bedside operation of night light function.
- USB 2A charge port.
- 110/230V selectable shaver output and isolating transformer.
- LED lifespan L70 50,000 hours.

General Information


Lamp Type	LED
Colour / Finish	White
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Surface
Warranty (Years)	2
CE Mark	Yes
Length (mm)	456
Width (mm)	70
Depth (mm)	73

Technical Information

Wattage	8W
Lumens Delivered	436lm
Lm/W	55lm
CRI	Ra 70
CCT	4000K
Input	230V
Hertz	50/60Hz
Operating Temp	0°C to 40°C

Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for ceiling mounting	No
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
With light source	Yes
Suitable for number of lamps	1
Colour housing	White
Nominal voltage	230-230 V
Control gear included	Yes
Degree of protection (IP)	IP20
Protection class	I
Suitable for emergency lighting	No
With movement sensor	No
With light sensor	No
Max. system power	8 W
Rated luminous flux acc. IEC 62722-2-1	436 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	70-79
Luminaire efficacy	55 lm/W
Width	70 mm
Height/depth	73 mm
Length	456 mm

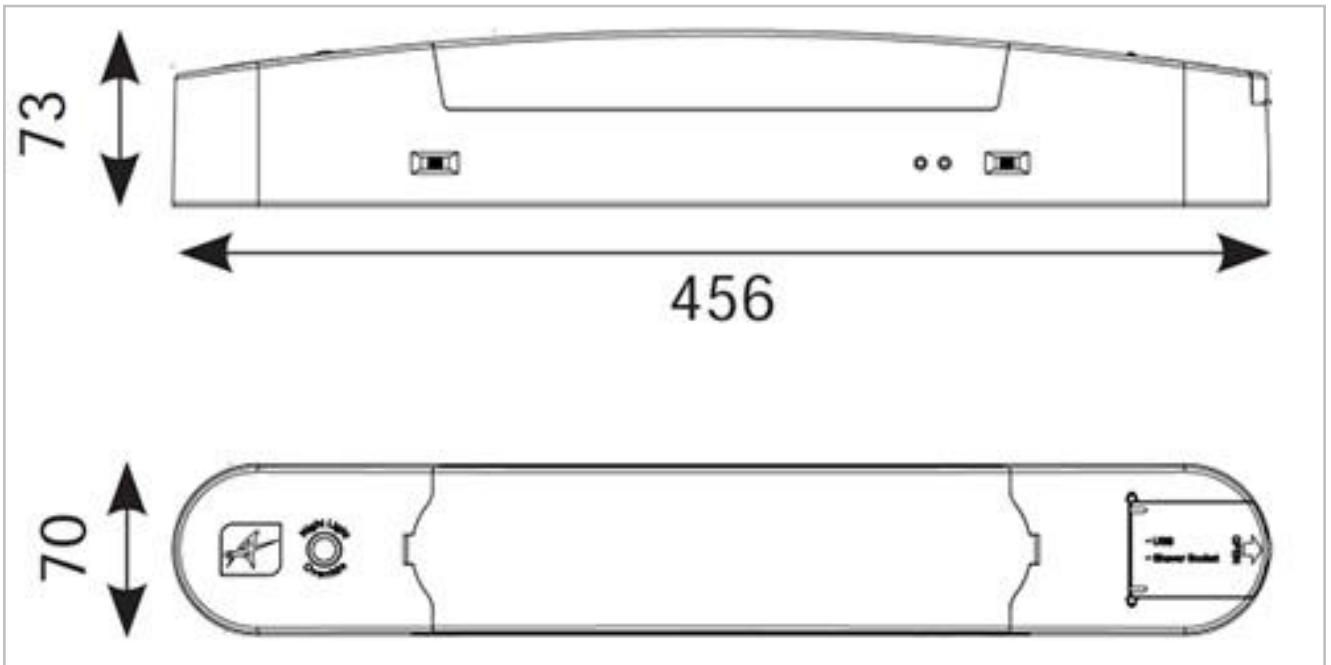

Datasheet generated from <https://onetimepim.com> last updated Friday, February 18, 2022 12:23:43 PM