

FXROLPW - Conventional RoLP LX wall



The RoLP LX Wall is ideal for dual use applications where a visual alarm device is required in addition to an audible alarm.

The RoLP LX is a reliable, high performing VAD (Visual Alarm Device) that is certified to EN 54-23.

Recommended for wall use and requiring just one installation point, the RoLP LX Wall is also available as a base only for use with any standard RoLP sounder.

Features and benefits

- Ultra low current consumption
- RoLP and RoLP Maxi sounder options
- Up to 7.5m coverage volume (switchable to 2.5m)
- 0.5 or 1Hz flash rate
- Use where current consumption is a key consideration
- Delivering up to 106dB(A) at 1 metre sound output
- Ideal for bedrooms, bathrooms and toilets
- Switch flash rate to 0.5Hz to reduce current consumption

EATON

Powering Business Worldwide


Specifier's guide

4.3 Accessories

Technical specification

Code	FXROLPWR
Mounting	Wall
Voltage	18 - 28VDC (Fire Use) 9 - 15 VDC (Fire Use)
Current	22 - 37mA dependent on setting (Sounder and beacon; tone 3)
Coverage (y)	7.5m on high output settings 2.5m on low output settings
Mounting height (x)	2.4m (max)
Coverage volume code	W-2.4-7.5
Coverage volume	135m ³ (15m ³)
Flash rate	1Hz (Switchable to 0.5Hz)
Operating temperature	-25°C to +70°C
Monitoring	Reverse polarity
Protection	IP65
Weight	200g
Body colour	Red
Flash colour	Red
Sound output	102dB(A) at 1 metre (Typical tone 3 - RoLP)

Dimensions

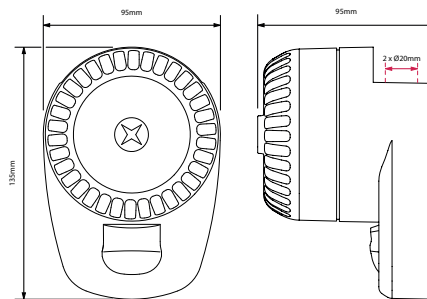

D (mm)	W (mm)	H (mm)
95	95	135

Catalogue numbers

Description	Code
RoLP wall red body base and sounder	FXROLPWR
RoLP wall red body base only	FXROLPWR-B