

Sensor-switched outdoor light

L 12

Silver
EAN 4007841 657918



max.60w									3 JAHRE HERSTELLER GARANTIE steinel.de/garantie
max. 60 W E27	infrared sensor 180°	max. 10 m	IP44	90° vertical	2 - 2000 lux	8 sec - 35 min	ideal 2 m	energy saving	manufacturer's warranty steinel.de/garantie

Function description

Looks really good, pricewise too. Designer sensor-switched outdoor light L 12, ideal for building entrances and building fronts, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone, aluminium trim panel.

Technical specifications

Dimensions (L x W x H)	272 x 155 x 108 mm	Reach, radial	r = 3 m (14 m ²)
Mains power supply	230 – 240 V / 50 Hz	Photo-cell controller	Yes
Mounting height max.	3,00 m	Twilight setting	2 – 2000 lx
Sensor Technology	passive infrared	Time setting	8 s – 35 Min.
Output	60 W	Impact resistance	IK03
Interconnection	No	IP-rating	IP44
With lamp	No	Protection class	II
Lamp	All-purpose lamp	Ambient temperature	-20 – 40 °C
Base	E27	Housing material	Aluminium
With motion detector	Yes	Cover material	Plastic, opal
Detection angle	180 °	Manufacturer's Warranty	3 years
Sneak-by guard	Yes	Settings via	Potentiometers
Capability of masking out individual segments	Yes	Version	Silver
Electronic scalability	No	PU1, EAN	4007841657918
Mechanical scalability	No		


Sensor-switched outdoor light

L 12

Silver
EAN 4007841 657918



Detection Zone

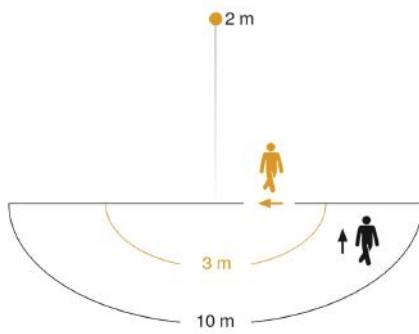

Mögliche Montagehöhe: 1,80 m – 3,00 m
Orange: radial
Schwarz: tangential

Dimension Drawing

